
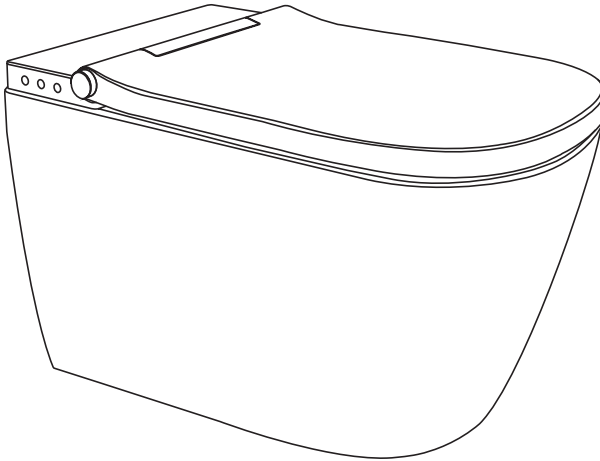


Novus Floor Standing Smart Toilet

Installation Instruction

Apply to V-7203

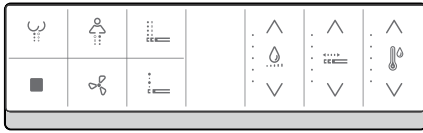

Thank you for purchasing this intelligent toilet, please use it carefully after reading this manual.

After installation, please hand over the installation and instruction manual to the end customer. Be sure to read the Instruction Manual before using your product and keep it properly for future reference. This manual picture is for reference only, please refer to the actual.

Installation is subject to the requirements of the applicable regulatory authority, the National Construction Code Volume Three –Plumbing Code of Australia, associated reference standards as applicable at the time and AS/NZS 3500.

To install, tighten each inlet connection to 10 N.m Max. torque.

Leakage test shall be done before first usage. Only qualified plumber for installation and maintenance.

Important Notice

Installation Instructions

Installation instructions are used to guide the correct installation of smart toilet. please read them carefully before installation.

Icon and Identification

 **Danger** Lead to serious injury or even death.

 **Caution** Operation practice without physical injury.

Please read the instructions in this chapter

Target Reader and Installer Qualifications

This smart toilet with water pipe can only be installed by qualified plumbers. Electrical installation can only be carried out by qualified electricians.

Safety Instructions

 **Caution** Product and/or performance damage

* Be sure to abide by the national/regional standards and local installation regulations.

 **Caution** Product damage caused by the frozen water

* It is forbidden to install smart toilets in rooms with the risk of frost. The lowest indoor temperature is not less than 4°C.

 **Caution** Product damage caused by condensation

* When the smart toilet is moved from the low temperature to the high temperature environment, please unplug the power for several hours firstly.

Forbid to dismantle independent components

 **Danger** Deadly electric shock danger!

* If the power cord is damaged, it must be replaced by the manufacturer's maintenance personnel or professionals.

* Appliance must be properly connected to ground.

* Fixed wiring must be equipped with an electric shock distance device under full-pole disconnection over-voltage level III conditions according to wiring rules.








* Specification of fixed wiring power supply wire is 1-2.5 square millimeters of cross section area.





* Ensure that the grounding end of the power supply line is 10 mm longer than that of the fire line (L) and the zero line (N).

 **Caution**

* The unit of length in this installation instruction is millimeter (mm).

Parts List

| | | | |
|-------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|
|  Inlet angle valve |  Inlet flexible water connection hose |  Electricity connector |  Filter kits |
|  Outlet pipe |  Pan fixing bolt set |  Installation Instruction +User Manual | |


| | | | |
|------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|
| Remote Control | | | |
|  Screw fixing set |  Fixing plate |  Support cradle |  Remote control |

⚠ Caution


Please make sure that the toilet is installed before the remote control is installed.
Only WaterMark certified components could be used to match with this smart toilet.

⚠ Caution

This smart toilet must be installed with appropriate backflow conforming to the national construction code volume three.
Installation can only be conducted by the authorized license plumber following NCC Part Three (PCA) with appropriate high-hazard cross connection control.
According to NCC Part Three (PCA), WMTS-051: 2021 and AS/NZS 3500.1, our products must be externally installed a high-hazard backflow protection device.
We recommended the Reduced Pressure Zone Device (RPZD) to be externally installed, below figure as an example. RPZD not included with this package , purchase from local market.



Installation Tools (not supplied)




Electric drill



Hacksaw



Wire cutters



Sealant gun



Tape measure



Marker pen



Sharp knife



File



Adjustable wrench



Screwdrivers




Straight ruler



Spirit level

Technical Drawing

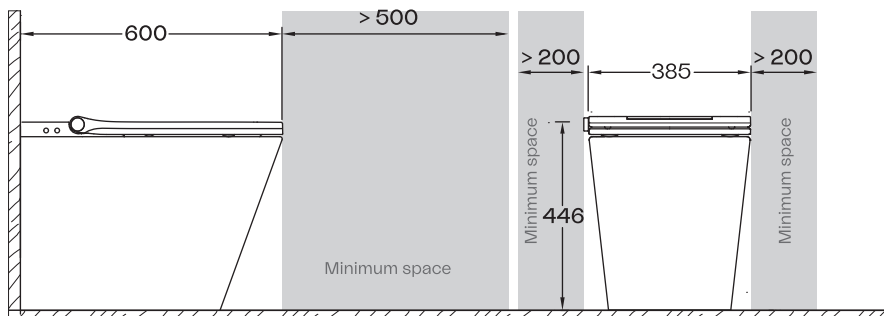








Toilet Installation









Confirmation before installation









- 1. The toilet installation area should be equipped with inlet hose.
- 2. The toilet installation area should be equipped with power cord.
- 3. “*” Recommended size



This operation should be carried out by professionals.

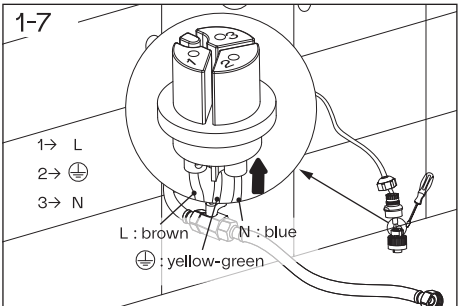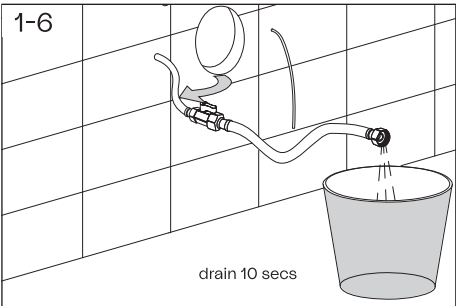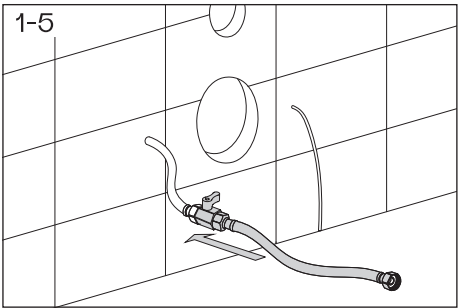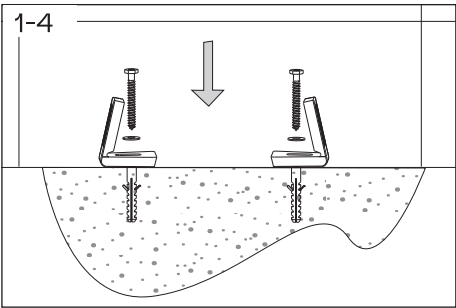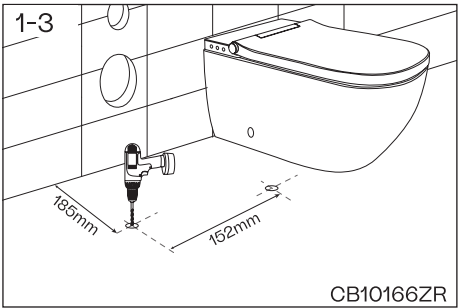
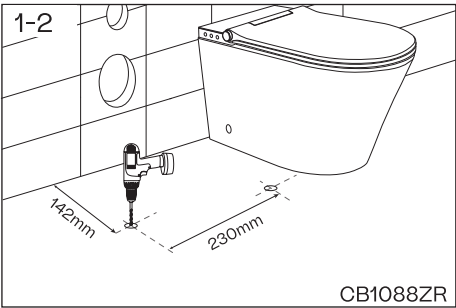
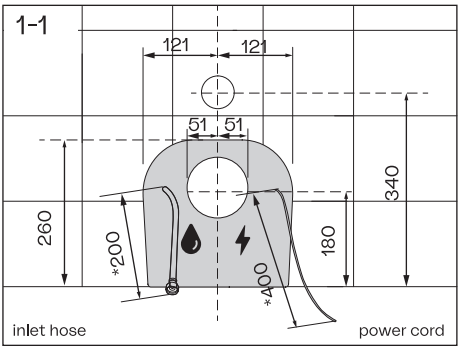


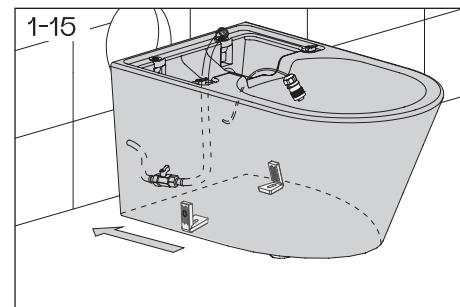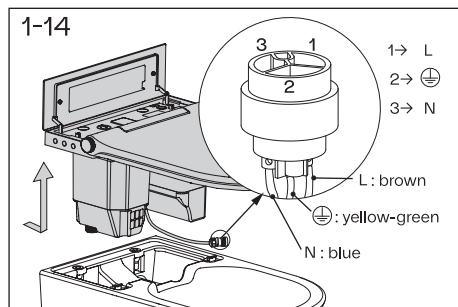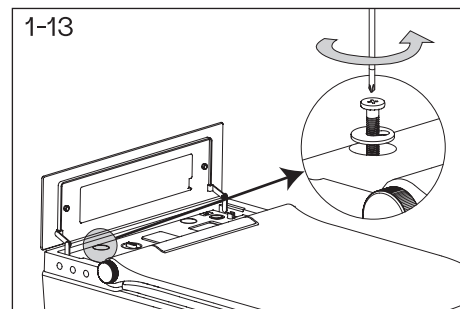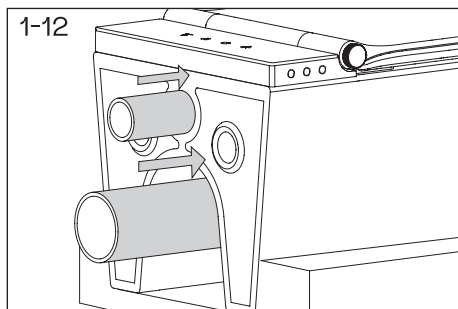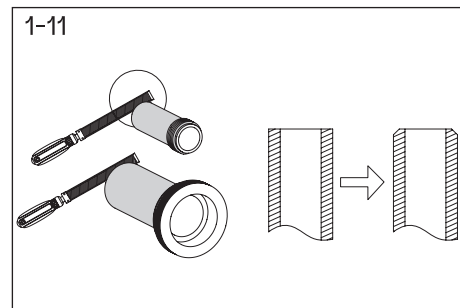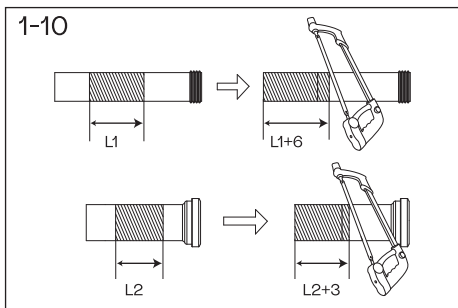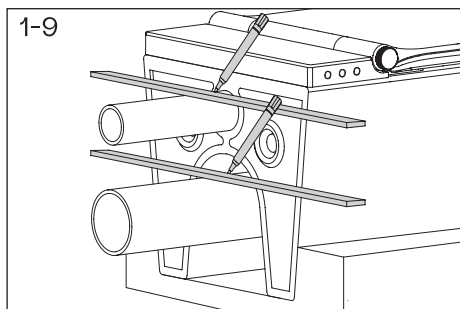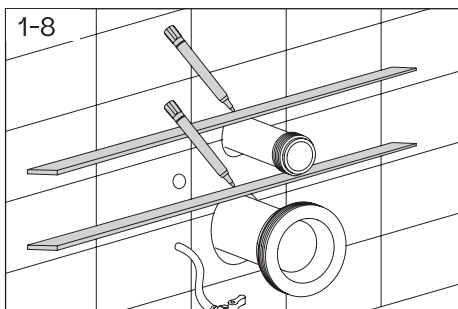

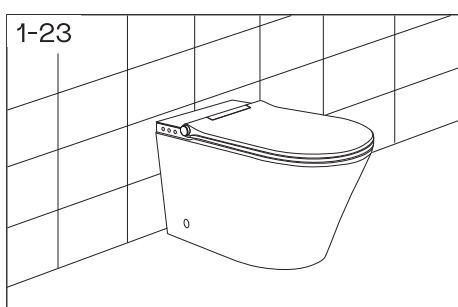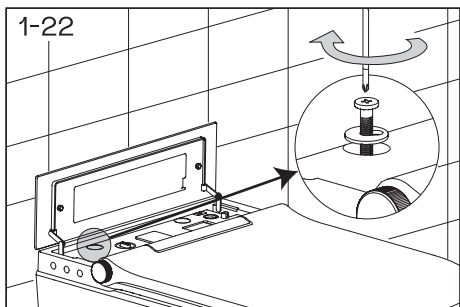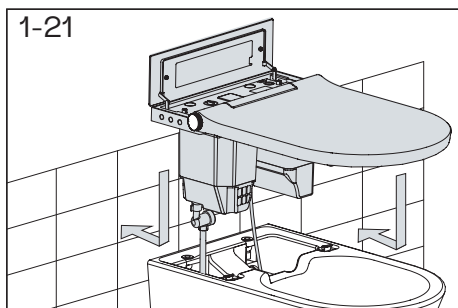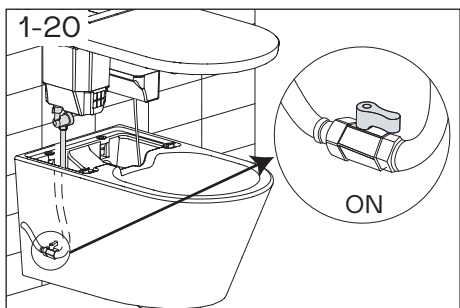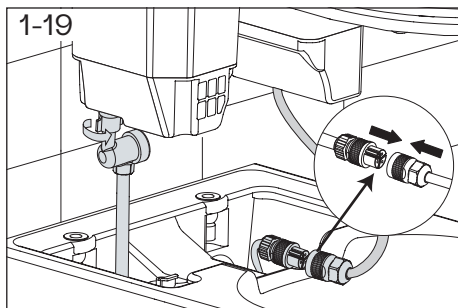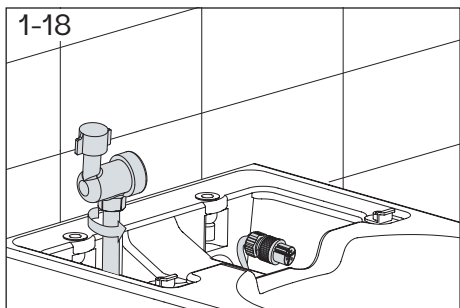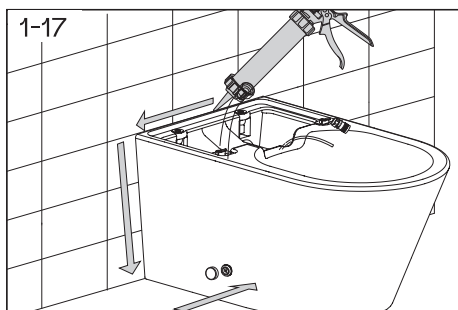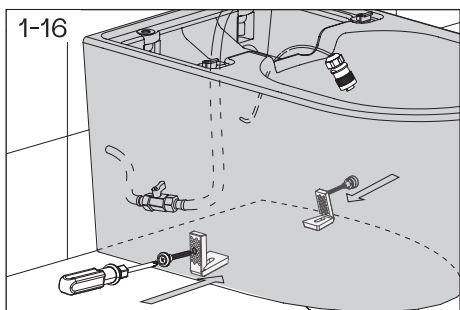

Remote Control Installation

* * Recommended size

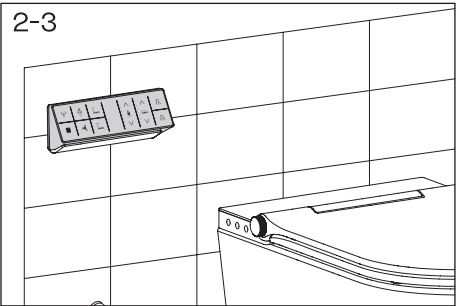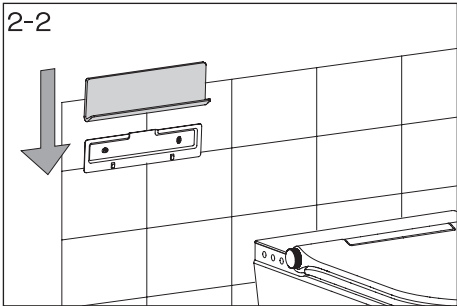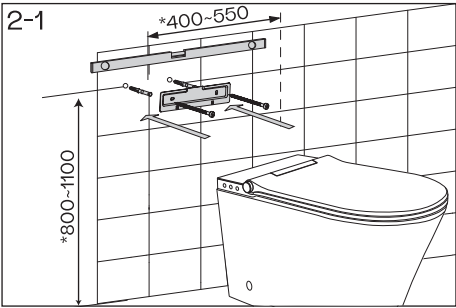

Thank you for choosing us

