


INSTALLATION INSTRUCTIONS KITCHEN MIXER USING FOR:



1. Cut a mounting hole 35mm in diameter
2. Fit Rubber Ring into groove on the mixer base
3. Fit Hoses through the mounting hole and place the mixer over the mounting hole
4. Fit Rubber Gasket and Metal Disc over Threaded Tail and screw on lock nut to secure the mixer
5. Connect Red Hose to hot water supply and blue hose to cold water supply
6. Turn on water supply and check for leaks

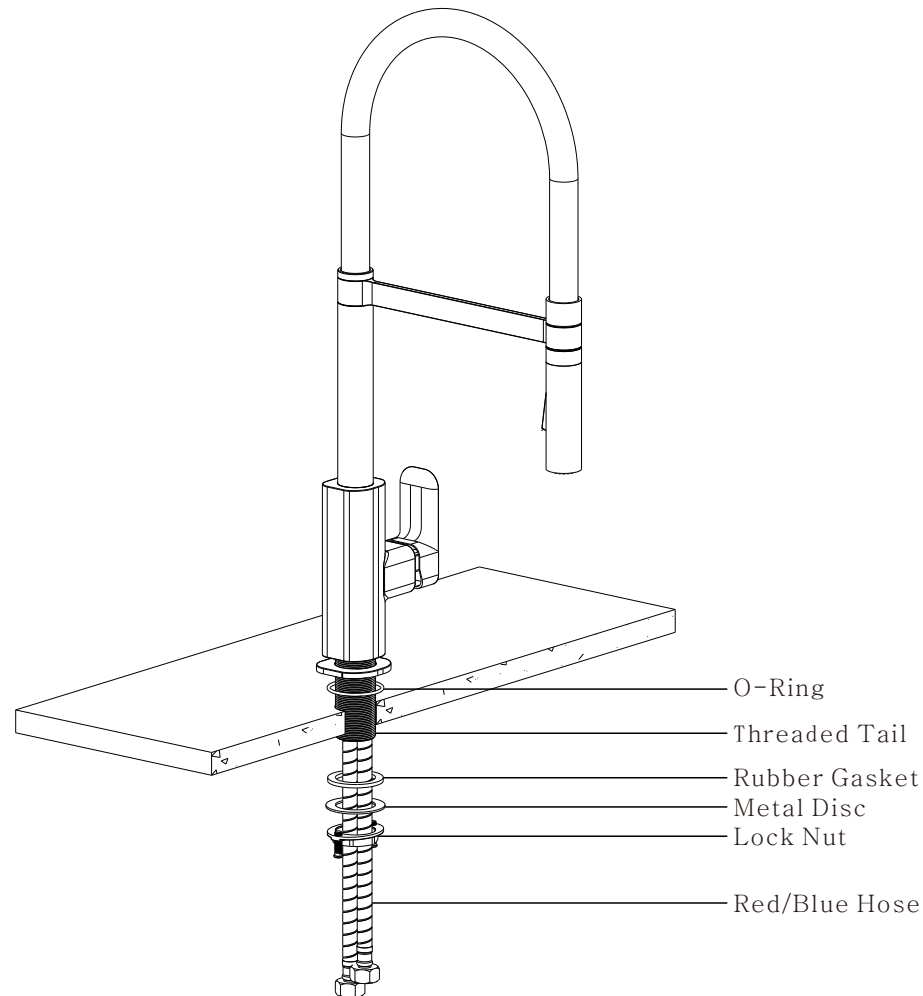

Recommended
Working Pressure
150-500kpa
Maximum Hot
Water Temperature
75 degrees

Note:

1. If the pressure exceeds or likely to exceeds 550kpa, an approved pressure limiting device must be installed.
 2. Flush Out all pipe work prior to installation.
 3. If the water temperature exceeds 75°C, an approved tempering valve must be fitted.
 4. Installation should comply with Australian Standard AS3500.
- Failure to comply with the above may void all warranties.

MAINTENANCE AND CARE:

1. Products Should be cleaned with mild liquid detergent or soap and water
2. Do not use cream cleaners or citrus based cleaning products, as they are abrasive.
3. Use of unsuitable cleaning agents may damage the surface. any damage caused in this way will not be covered by warranty

Disclaimer

While we aim to ensure the specifications shown are correct at the time of printing, Attica Australia reserves the right to make modifications without prior notice.