


Code: LMWIN-900

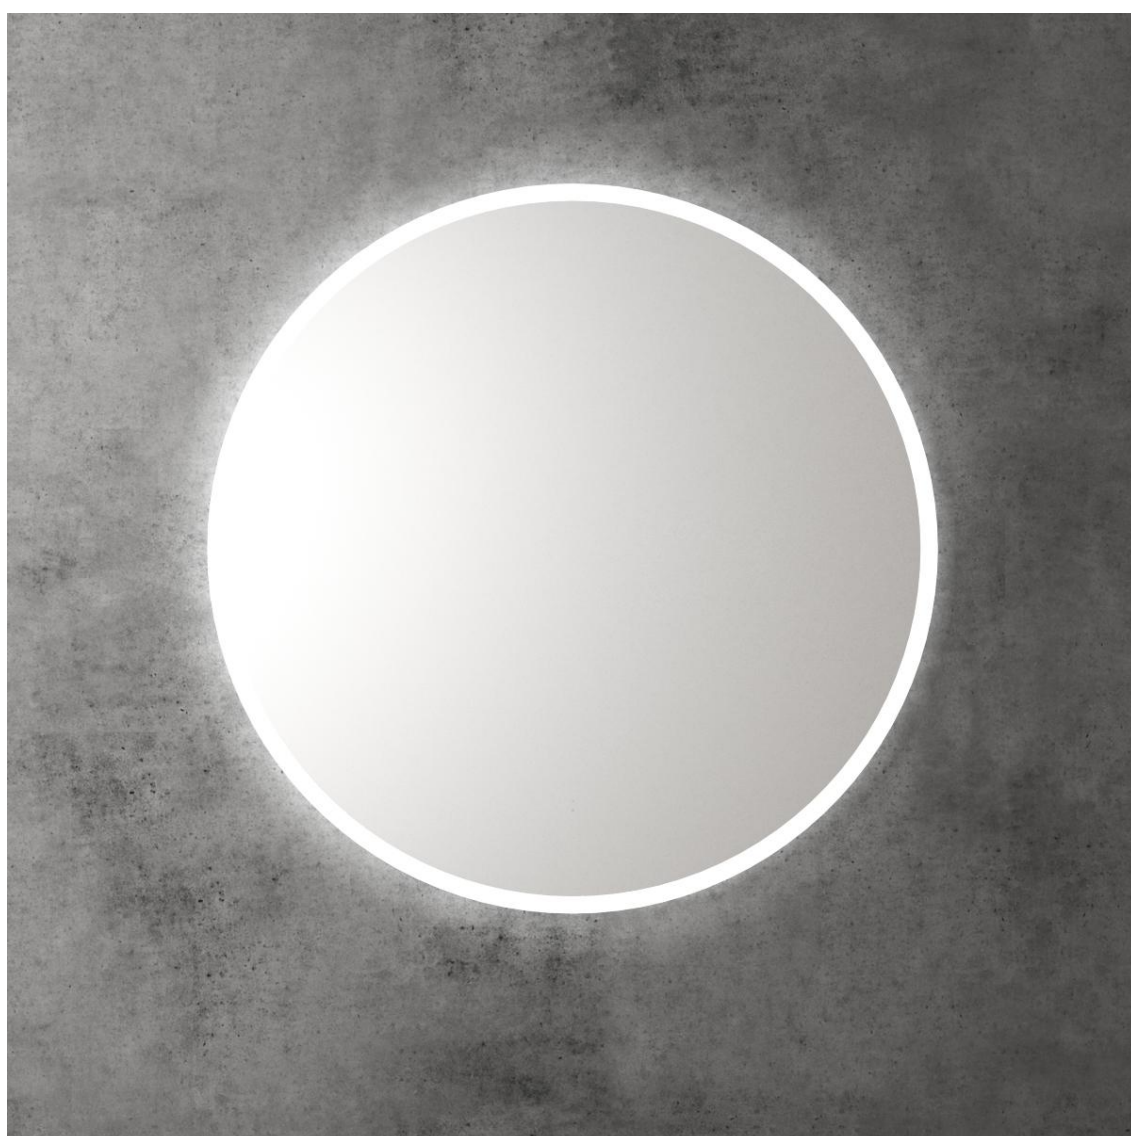

- LED lighting
- Mirror demister
- Touch free sensor
- Backlit
- Three-colour dimmable lighting
- Copper free mirror
- Stainless steel frame
- Optional frame colour
- Auto cut-off in 1.5 hours


The technical drawing consists of three views of a circular wall-mounted device:

- Front View:** A circular face with a diameter of 900. A dimension of 21 indicates the thickness of the outer rim. A vertical centerline is shown.
- Side View:** A cross-section showing the device's profile. The total height is 175, with a 50-unit section at the top. The device is mounted on a wall (indicated by a red arrow labeled "installation" and a red line labeled "wall"). The mounting bracket has a width of 30.
- Back View:** A circular face showing internal components. The outer rim has a thickness of 50. The main body has a width of 500 and a height of 400. A transformer is located at the bottom, with a width of 230 and a height of 150. A cable (indicated by a red arrow labeled "transformer") connects the main body to the transformer. A dimension of 350 indicates the distance from the center to the transformer.


Diamond Collection

Windsor 900

Options of coloured frames:

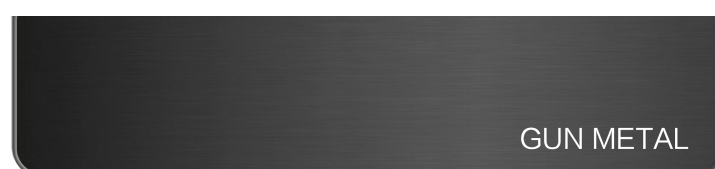

LMWIN-900-GM
Gun Metal

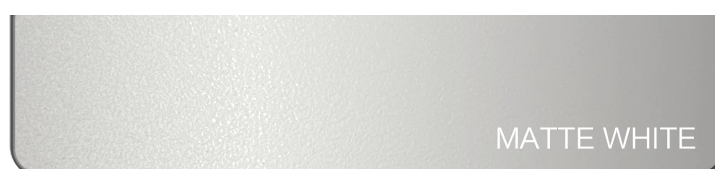

LMWIN-900-MW
Matte White




LMWIN-900-MB
Matte Black



LMWIN-900-BN
Brushed Nickel




LMWIN-900-BG
Brushed Gold

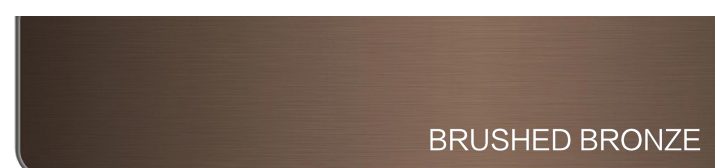

LMWIN-900-BZ
Brushed Bronze

Windsor 900 with Frames

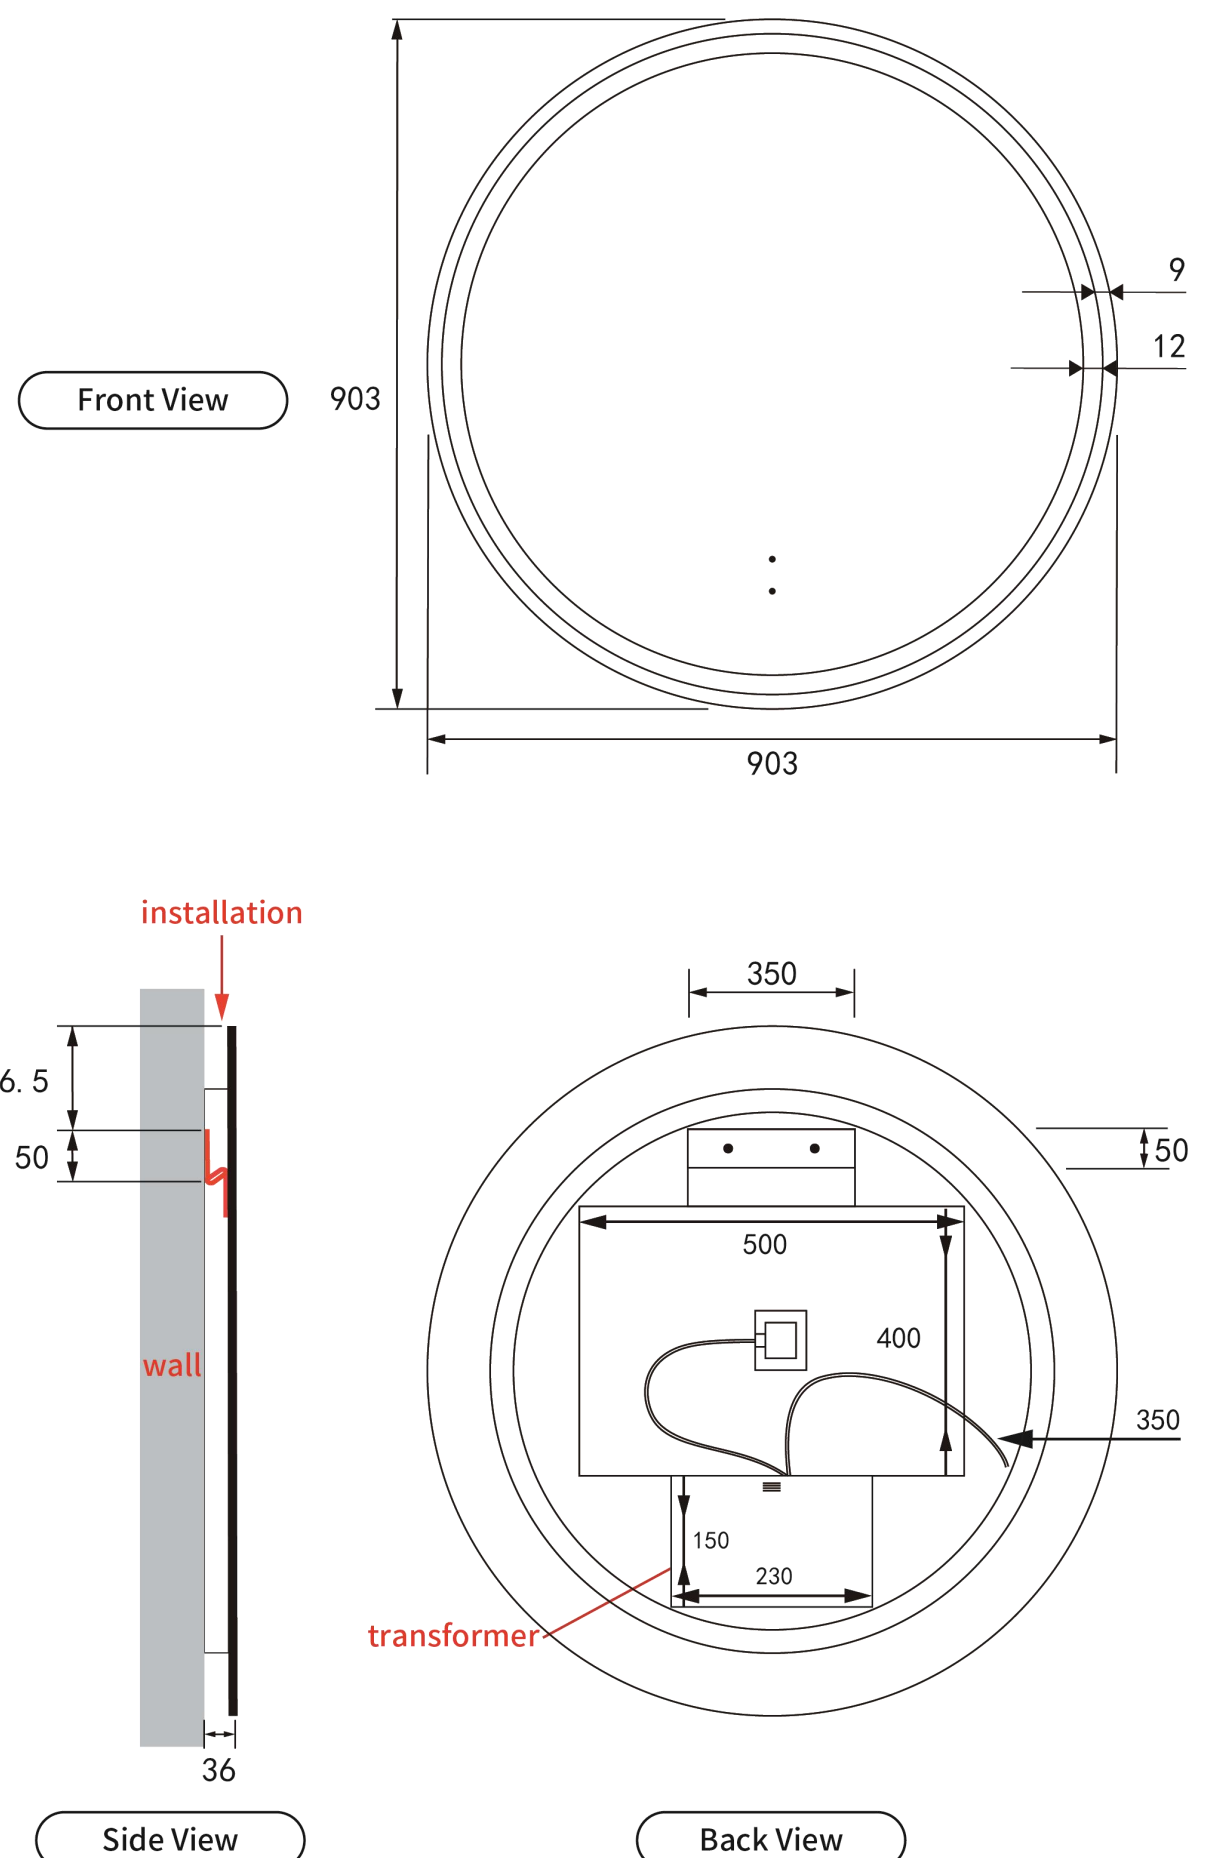

LIGHTING SPECIFICATIONS
CCT:6000K-4000K-3000K
CRI: >80
IP Rating: IP44
POWER CONSUMPTION: 36W